

SPECIFICATIONS

Recommended Use	Domestic, hotel & commercial
Material	Ceramic + ABS
Color	White
Weight	35kg
Water pressure	0.15 Mpa - 0.75 Mpa
Voltage	220-240V 50-60Hz
Power	1350 W





KEY FEATURES


- Cover and seat open and close automatically (optional)
- Smartphone app control (Optional)
- Front & rear wash
- Water flow & water temperature adjustable
- Oscillating wash
- Nozzle position adjust adjustable
- Warm air drying
- Drying temperature
- Seat temperature
- Auto front & rear wash program
- Child auto front & rear wash program
- Mute mode
- Night light
- Eco-mode
- Soft-close cover & seat
- Instant heating
- Rimless floor-standing toilet
- Easy-clean ceramic surface
- 6L for full flush/ 3L for half flush

CODES / STANDARDS



- SAA

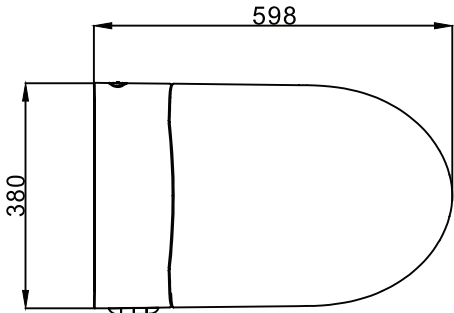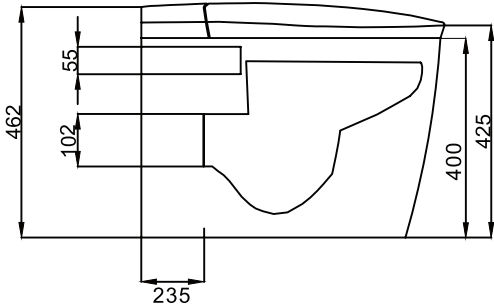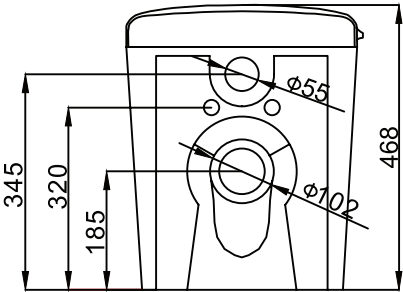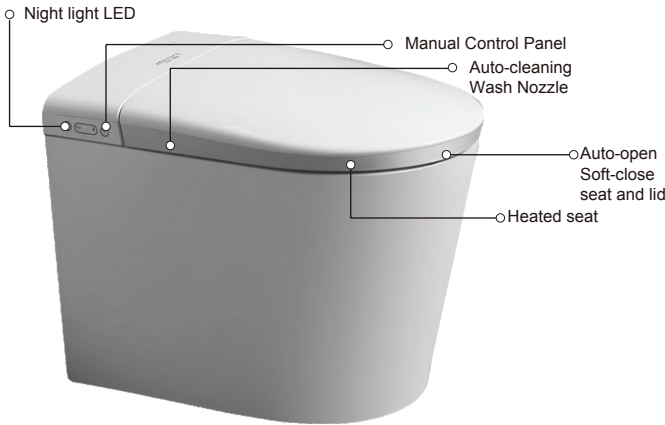

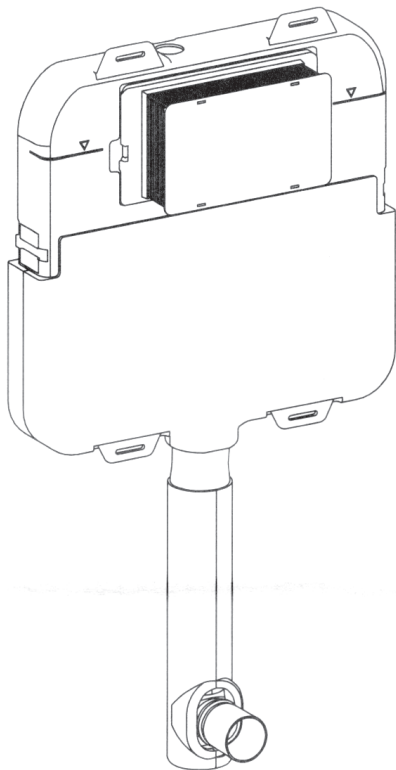

APPLICATION

- For front actuation
- Concealed installation

CHARACTERISTICS

- Thickness of cistern 80mm
- Can fit with all actuator plates in this catalog
- Surface of cistern is covered by foam, which can prevent droplet formation
- 6/3L, 4.5/3L, 4/2L adjustable
- The inlet hole location is on the top
- Can be modified into pneumatic version cistern
- Feet height adjustable 0-150mm

SCOPE OF DELIVERY

- Water supply angle valve
- Protection box for installation
- Installation plug
- Flush pipe
- Excluded: actuator plate

FLUSH VOLUME

Factory setting	6L/3L ; 4.5L/3L ; 4L2L
------------------------	------------------------

CODING INFORMATION

Product code	Description
WS-FS-1	Concealed cistern, for floor standing toilets

